


# Tunable Morphology of Polyaniline/Multi-wall Carbon Nanotube for Organic Solar Cells

Zeinab Jarrahi <sup>a</sup>, Golamali Farzi <sup>a,\*</sup>, Reza Charekhah <sup>a</sup>, Mahsa Darabi <sup>a</sup>, Alexis Fisher <sup>b</sup>

<sup>a</sup> Department of Polymer Engineering, Faculty of Petroleum and Petrochemical Engineering, Hakim Sabzevari University, P. O. Box 397, Sabzevar, Iran

<sup>b</sup> Laboratoire de Physique des Lasers, Université Sorbonne Paris Nord, CNRS, (UMR 7538), 99 av. JB Clément, 93450 Villetaneuse, France

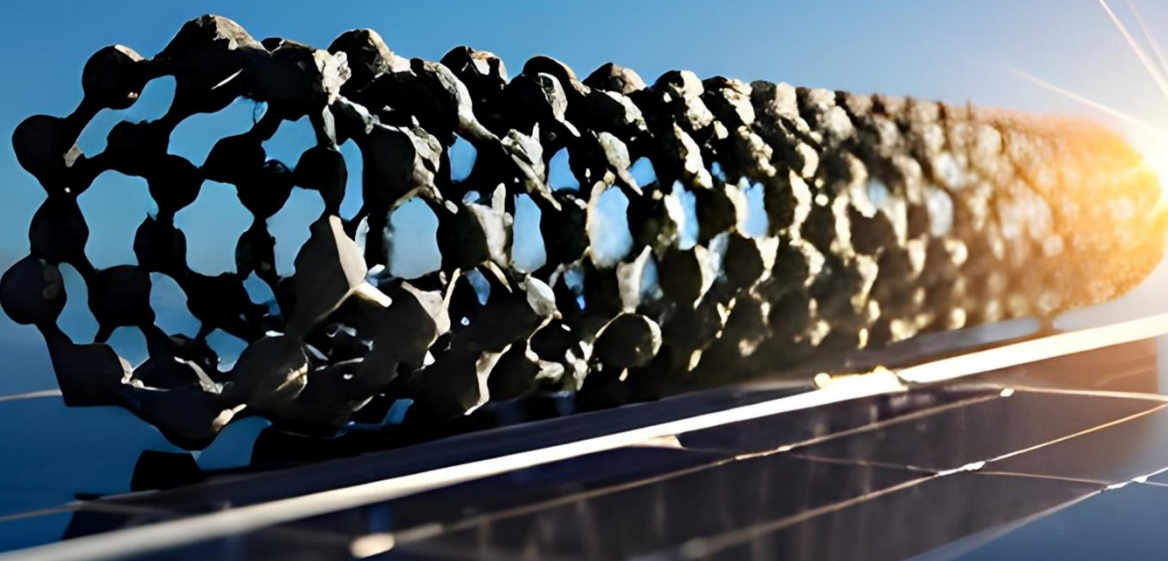

**Editor's note:** The main factors that limit the power conversion efficiency of organic solar cells are exciton dissociation, charge transport, and charge recombination. Jarrahi et al. proposed enhancing the efficiency of polyaniline-based organic solar cells by controlling their morphology through the incorporation of multi-walled carbon nanotubes and adjusting the polymerization conditions.

doi: 10.22034/jams.2024.210130

How to cite: Z. Jarrahi et al. *Journal of Applied Material Science*, 2025, 1, 210130.

JOURNAL OF  
**APPLIED  
MATERIAL  
SCIENCE**

jams.hsu.ac.ir